

RoomMaster




Application

With the RoomMaster, the air quality and temperature are controlled individually for each room using a central control unit.

This means you have your feel-good climate conveniently under control, even without an app.

Technical data

Measured variable	Range
Temperature	0 - 40°C
Humidity	0 - 100% rH
Air quality (VOC)	0 - 1000 ppm
Power supply	24V/100 mA
Size	88 x 88 x 16.5 mm
Communication	ModBus

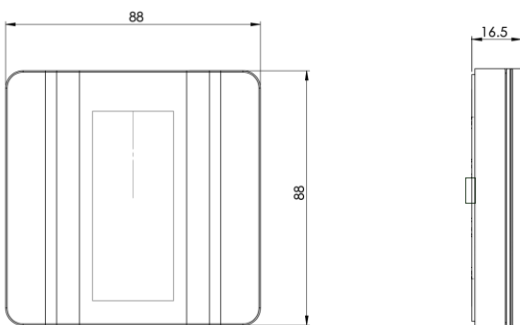

Display



The RoomMaster always consists of a display part and a mounting base.

The display is simply attached to the base.




RoomMaster

The RoomMaster is intended for connection to a FlatMaster via the ModBus. It receives its power supply via the FlatMaster.

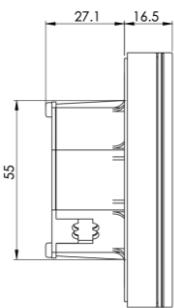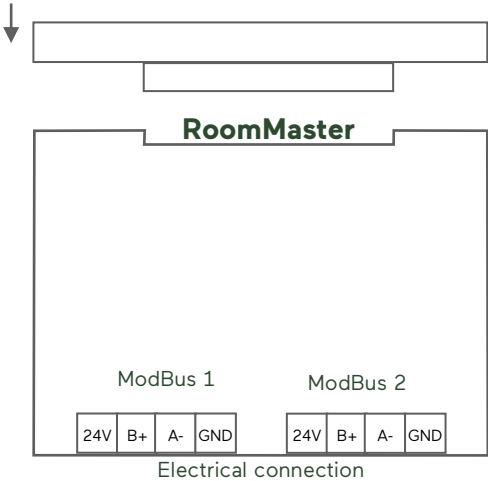

Flush mounting
(we offer a separate housing
for surface mounting)

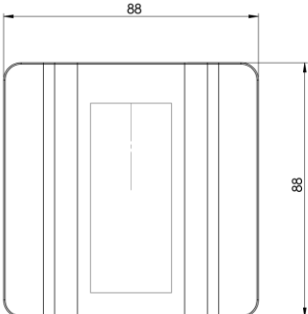

Front view